

type number	H	thickness of metal sheet	weight	amount of bolts for connection
	(mm)	(mm)	(kg/ks)	
NIXS 50_IX	47	0,8	0,03	2
NIXS 100_IX	97	0,8	0,06	4




product description: The coupling is used to connect cable trays
 The connection is made by bolt NIXSM 6X10. The bolt and the nut provide a conductive equipotential bond up to 25 A.
 To protect the cables, the bolt head is inside the cable tray.

surface finish: X - stainless steel AISI 304
 (AISI 316, AISI 316L only to order)

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

storage: ČSN EN 60721-3-1

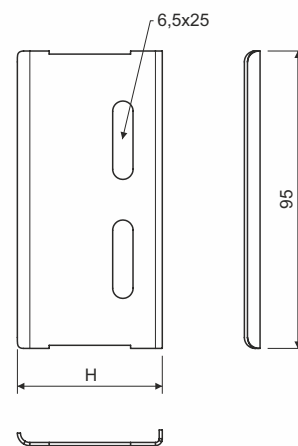

 **WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



coupling



plastic bag



cardboard