


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
NVKR 62_S	62	62	379	12	0,55	0,25	🔥
NVKR 62_F					0,6	0,33	🔥
NVKR 125_S	125	125	442	12	0,55	0,47	🔥
NVKR 125_F					0,8	0,61	🔥
NVKR 250_S	250	250	567	12	0,55	1,02	🔥
NVKR 250_F					0,8	1,72	🔥
NVKR 500_S	500	500	817	15	0,70	3,26	🔥
NVKR 500_F					0,8	4,40	🔥

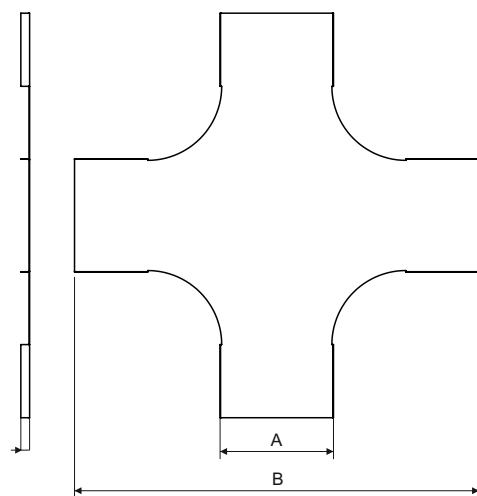

product description: This cover is used to cover the cross-over.
To fix the cover use 6 pcs of cover fixtures VU or NUV.
These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

psales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
🔥 products are approved for non-standard constructions

storage: ČSN EN 60721-3-1

